


Specifications	
Material:	22 Gauge Domestic Steel (Low Lead Content)
Design Weight Capacity:	100 lbs.
Pressure Drop @ 1200 CFM:	.14 Inches of H <sub>2</sub> O

Unit Powered by : BL-PP-0023 Auto Sensing Ballast.  
 Power Input : 120V/.40A-240V/0.21A,50/60Hz  
 Power Consumption : 18 Watts (.40 AMPs @120VAC)

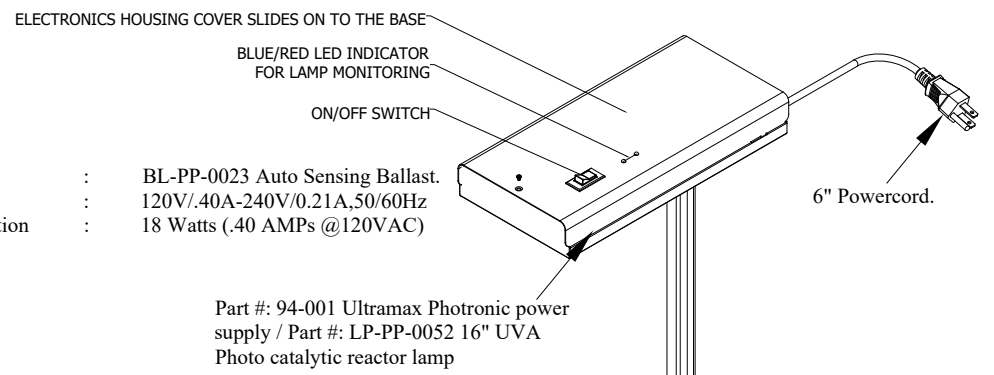

Part #: 94-001 Ultramax Photronic power supply / Part #: LP-PP-0052 16" UVA Photo catalytic reactor lamp

Preferred knock outs for Photronic application

Part #: 91-030 PCO Screen

Foam Gasket (also on back of Door)




3 Inch Steel Handle

3/8 Inch Knock out for View Port

Part # 91-006 Replacement MERV-11 Filter

Minimum Space Required for Replacement, 25"

Additional knock outs for different Installations

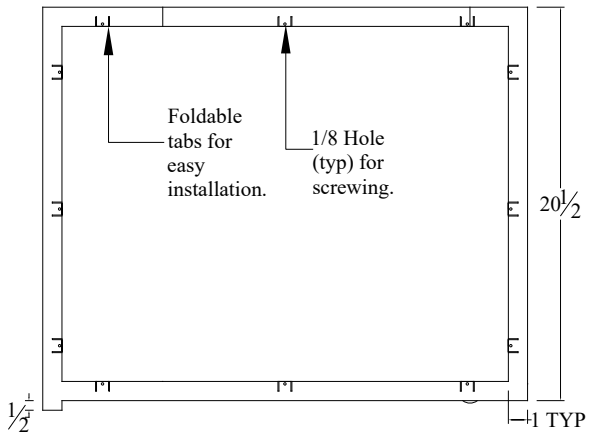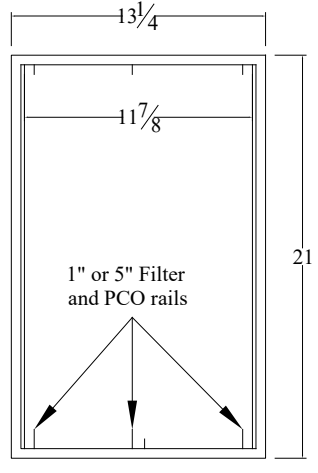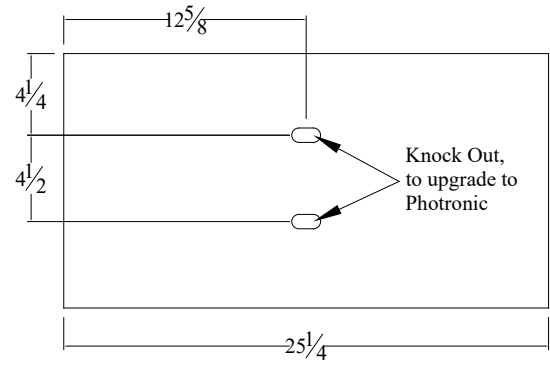

**Ultravation, Inc.**  
 67 Tubbs Ave  
 Brandon Vermont 05733.  
 Ph: 802-247-0034  
 Fx: 802-247-0033  
 www.Ultravation.com

Part #: 92-001	Drawing #: DC-IH-3031	Rev -*
Description: Photronic Straight Through w/ 20 x 25 x 5" MERV-11 filter, ST style without remote UVC Lamps, 120v 60 Hz.		
Date: 11/03/06	Scale:	Creator: JSM