

Specifications

Material: 22 Gauge Domestic Steel (Low Lead Content)

Pressure Drop @ 1200 CFM: .15 Inches of H₂O

Photronic Unit : BL-PP-0023 Auto Sensing Ballast.
 Power Input : 120V/.40A-240V/0.21A,50/60Hz
 Power Consumption : 18 Watts (.40 AMPS @120VAC)

Part # ASIH1001 Dual 12" Ultravation T3 Remote UVC lamps.

ELECTRONICS HOUSING COVER SLIDES ON TO THE BASE

BLUE/RED LED INDICATOR FOR LAMP MONITORING

ON/OFF SWITCH

6" Powercord.

10' Remote lamp Lead Powered by Photronic unit

Part #: 94-002 Ultramax Photronic power supply / Part #: LP-PP-0052 16" UVA Photo catalytic reactor lamp

Preferred knock outs for Photronic application

Part #: 91-032 PCO Screen

Foam Gasket (also on back of Door)





3 Inch Steel Handle

3/8 Inch Knock out for View Port

Part # 91-013 Replacement MERV-11 Filter

Minimum Space Required for Replacment, 25"

Additional knock outs for different Installations

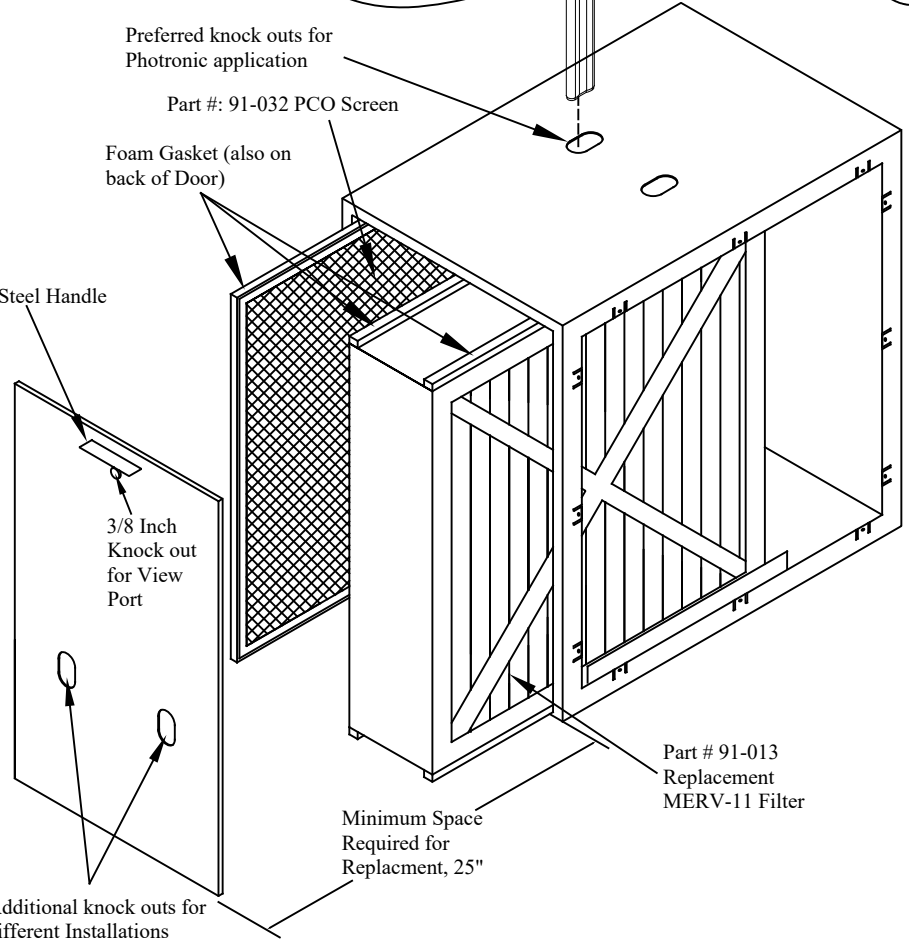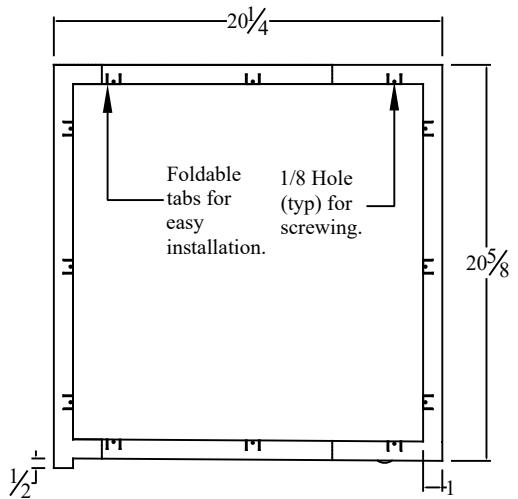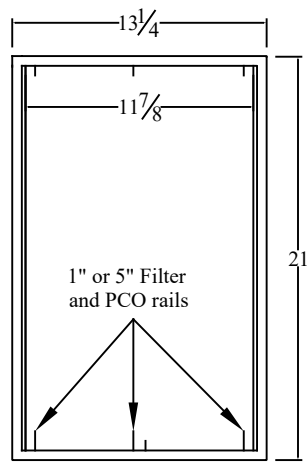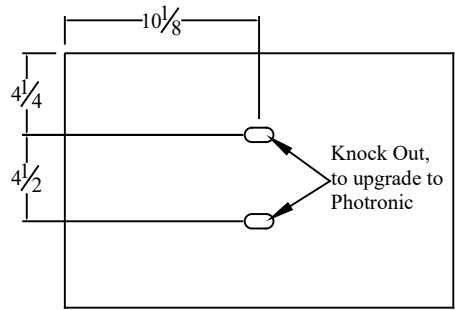

Ultravation, Inc.
 67 Tubbs Ave
 Brandon Vermont 05733.
 Ph: 802-247-0034
 Fx: 802-247-0033
 www.Ultravation.com

Part #: 92-032 | Drawing #: DC-IH-3061 | Rev -*

Description: Photronic Straight Through w/ 20 x 20 x 5" MERV-11 filter, ST style w/ 12" remote UVC Lamps, 120v 60 Hz.

Date: 11/03/06 | Scale: | Creator: JSM